







# AQ-PSx-1 SERIES Dual Voltage Regulated Power Supplies




## SPECIFICATIONS

Type:	Regulated switching mode power supply (5A, 13V DC)
Waterproof:	Yes - IPx5
Input Voltage:	100-240V AC (power input auto sensing/switching)
Input Frequency:	50/60 Hz
Efficiency:	≥87%
Power Consumption:	≤0.5W (at 240V AC)
Power Factor:	≥0.9 (at full load)
Short Circuit Protection:	Continuous
Output Plug:	2x female spade connectors (+12V DC (red), Neg (black))
Output Voltage:	13V DC regulated
Output Current:	5A
Ripple & Noise:	260mV (max)
Voltage Accuracy:	±2%
Line Regulation:	±2%
Load Regulation:	±5%
Operating Temperature:	-20°C - 70°C
Storage Temperature:	-20°C - 85°C
Dimensions:	49 x 234 x 110 mm
Certifications:	UL1563 class2, UL1310, CSA, CE
Additional Features:	Over Voltage Protection, Over Current Protection Over Temperature Protection

## AVAILABLE MODELS & CONNECTIONS

Model	Input (AC)
AQ-PSUS-1	 110V AC US 3-prong Plug
AQ-PSTS-1	 220V AC DSMT Plug Yellow
AQ-PSJ-1	 220V AC Gecko In-Link J-Cord
AQ-PST-1	 110/220V AC Female Spade Connectors
AQ-PSB-1	 110/220V AC 4-pin amp/molex connector
Model	Output (DC)
All models	 12V DC Female Spade Connectors

## DIMENSIONS

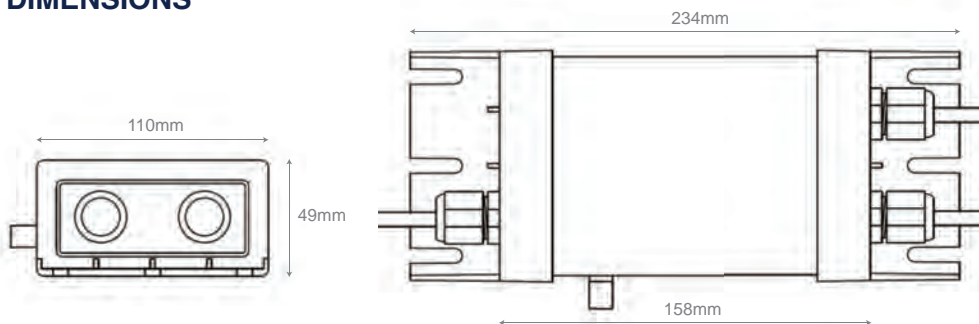

## Aquatic AV

282 Kinney Drive  
San Jose, CA 95112, USA

E-mail: [info@aquaticav.com](mailto:info@aquaticav.com)

US & Canada: 1 877 579 2782

International: +1 408 559 1668

Fax: +1 408 559 0125

[www.aquaticav.com](http://www.aquaticav.com)

Design and specification subject to change without notice.E&OE